
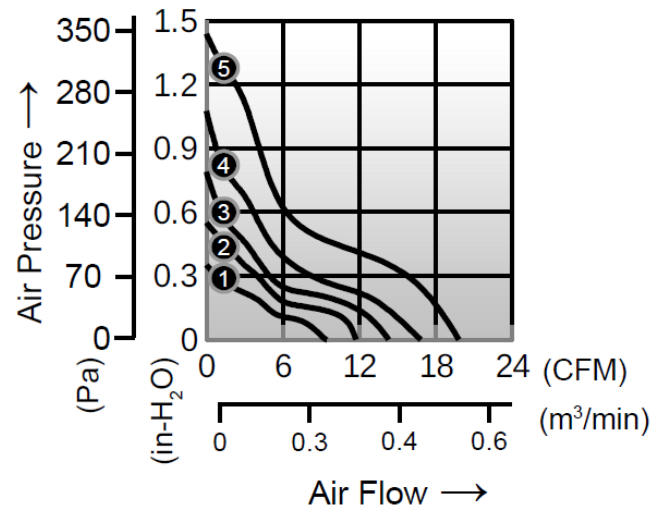
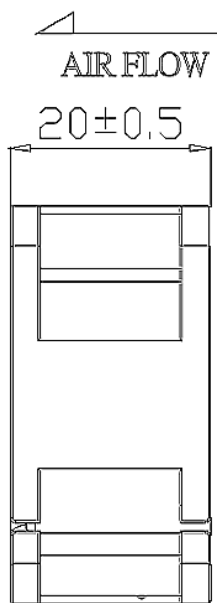


AD4020GB SERIES

- Size: 40 x 40 x 20mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 45.0g

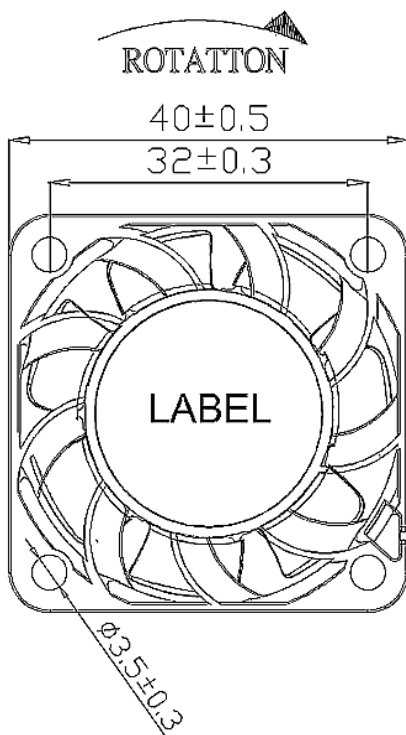

Unit:mm

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH2O)	dB(A)
① AD4020V12BLWGB	12	0.08	0.96	8000	9.4	0.35	33
② AD4020V12BMWGB	12	0.11	1.32	10000	11.7	0.55	40
③ AD4020V12BHWGB	12	0.17	2.04	12000	14.3	0.79	44
③ AD4020V24BHWGB	24	0.13	3.12	12000	14.3	0.79	44
④ AD4020V12BUWGB	12	0.25	3.00	14000	16.8	1.08	49
④ AD4020V24BUWGB	24	0.15	3.60	14000	16.8	1.08	49
⑤ AD4020V12BVWGB	12	0.41	4.92	16000	19.8	1.44	53
⑤ AD4020V24BVWGB	24	0.18	4.32	16000	19.8	1.44	53

B = Ball Bearing