
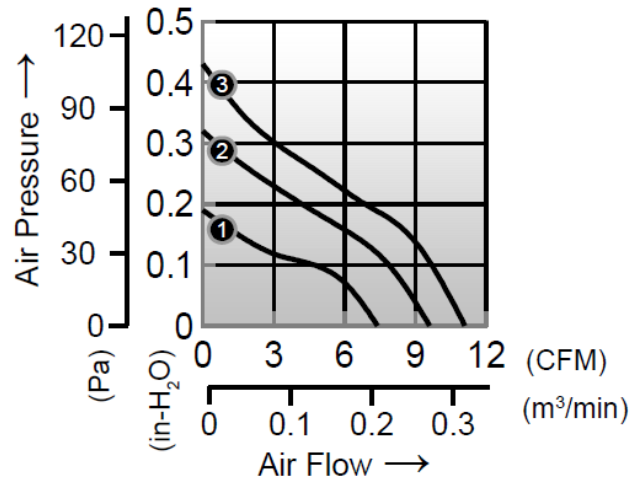


## AD4020GS SERIES

- Size: 40 x 40 x 20mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 27.0g

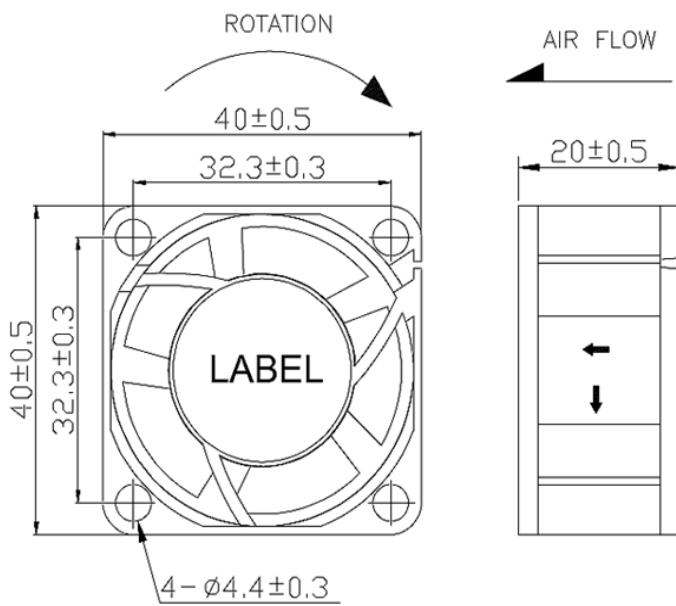

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH <sub>2</sub> O)	dB(A)
① AD4020V12FLWGS	12	0.10	1.20	5000	7.4	0.19	21
① AD4020V24FLWGS	24	0.07	1.68	5000	7.4	0.19	21
② AD4020V12FMWGS	12	0.12	1.44	6500	9.6	0.32	25
② AD4020V24FMWGS	24	0.09	2.16	6500	9.6	0.32	25
③ AD4020V12FHWGS	12	0.16	1.92	8600	11.1	0.43	33
③ AD4020V24FHWGS	24	0.13	3.12	8600	11.1	0.43	33

F = Fluid Bearing