
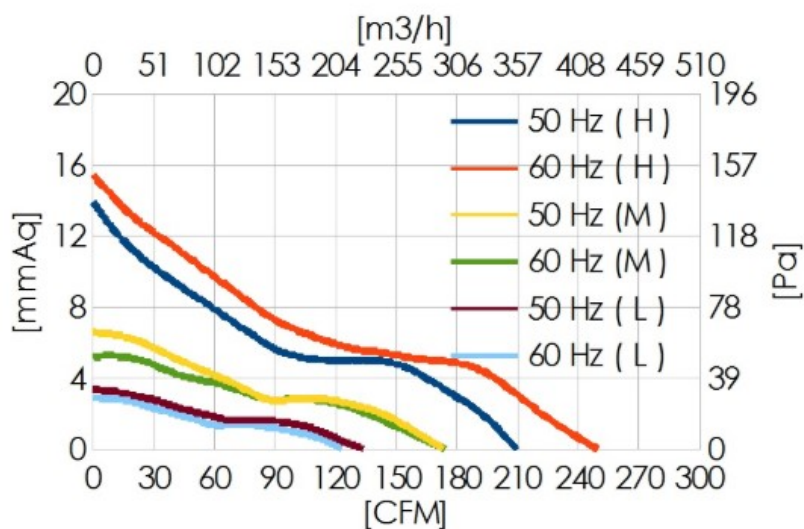


AA1751DG SERIES

- Size: 172 x 51mm
- Housing: Aluminum
- Impeller: Thermoplastic PBT, UL94V-0
- Motor: AC Induction Capacitor Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A

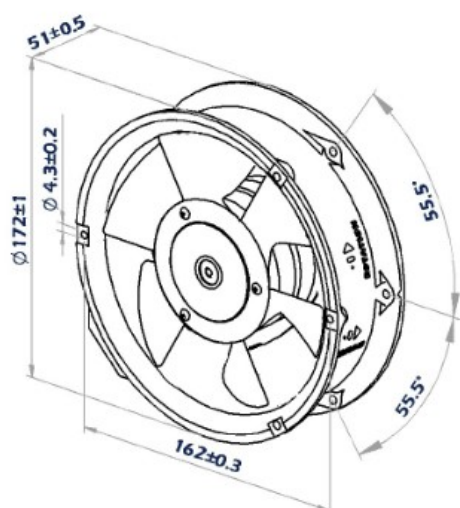

Model Number	Voltage	Frequency	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(mmH2O)	(dB(A))
AA1751V11BU*DG	115	50/60	0.27/0.29	26/26	2800/3300	230/270	16.5/20	55/61
AA1751V22BU*DG	230	50/60	0.10/0.11	23/26	2800/3300	230/270	16.5/20	55/61
AA1751V11BH*DG	115	50/60	0.25/0.21	27/25	2700/3100	210/250	14/15.5	53/59
AA1751V22BH*DG	230	50/60	0.11/0.12	26/27	2700/3100	210/250	14/15.5	53/59
AA1751V11BM*DG	115	50/60	0.12/0.15	14/17	2400/2350	174/174	6.6/5.2	51/51
AA1751V22BM*DG	230	50/60	0.07/0.10	16/19	2400/2350	174/174	6.6/5.2	51/51
AA1751V11BL*DG	115	50/60	0.07/0.07	8/9	1800/1700	135/123	3.3/2.9	47/45
AA1751V22BL*DG	230	50/60	0.04/0.05	10/11	1850/1700	135/123	3.4/2.9	47/45

* for T/W = Terminals/ Lead Wires