
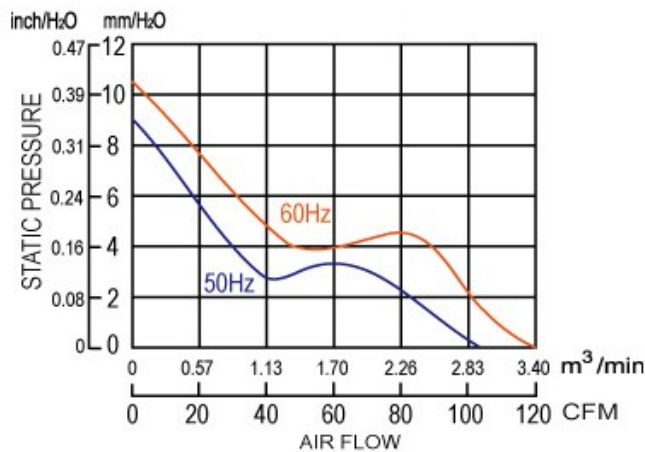


AA1238ZS SERIES (WITH RD/FG FUNCTION)

- Size: 120 x 120 x 38mm
- Housing: Aluminum
- Impeller: Thermoplastic PBT, UL94V-0
- Motor: AC Induction Capacitor Motor
- Operating Temperature: -20°C ~ +70°C
- Operating Voltage: 103 VAC to 126 VAC for 115V
207 VAC to 253 VAC for 230V
- Insulation: Class A

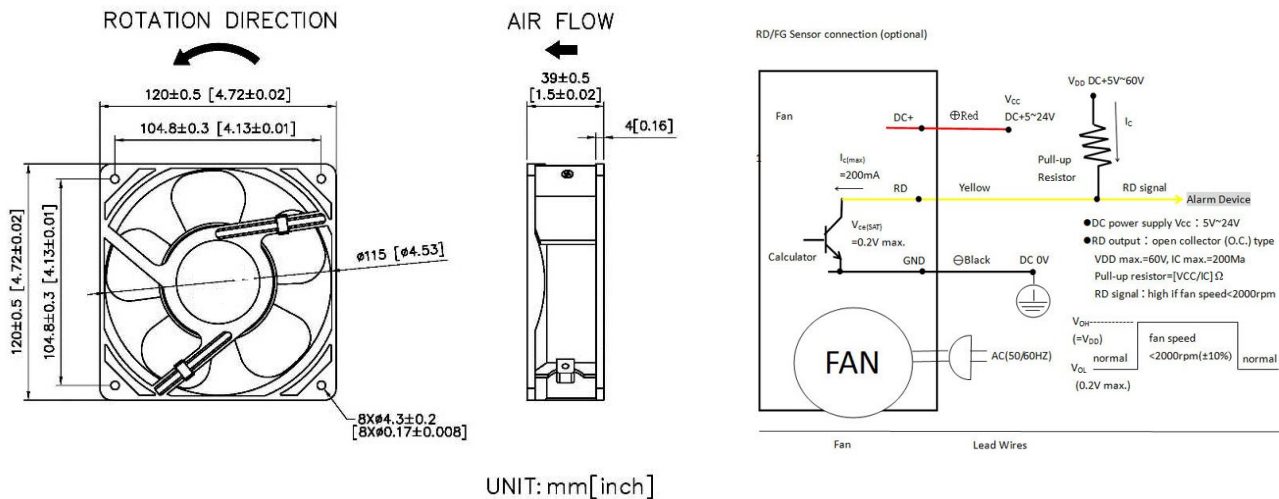

Model Number	Voltage	Frequency	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
AA1238V11BH*ZS	115	50/60	0.12/0.12	15/15	2700/3200	110/120	9/10.5	43/47
AA1238V22BH*ZS	230	50/60	0.1/0.1	15/15	2700/3200	110/120	9/10.5	43/47

* for T/W = Terminals/ Lead Wires