


## CA050F SERIES


- Size:  $\phi 50\text{mm}$
- Housing / Impeller: Aluminum / Aluminum
- Motor: AC Shaded Pole Type
- Operating Temperature:  $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation: Class A

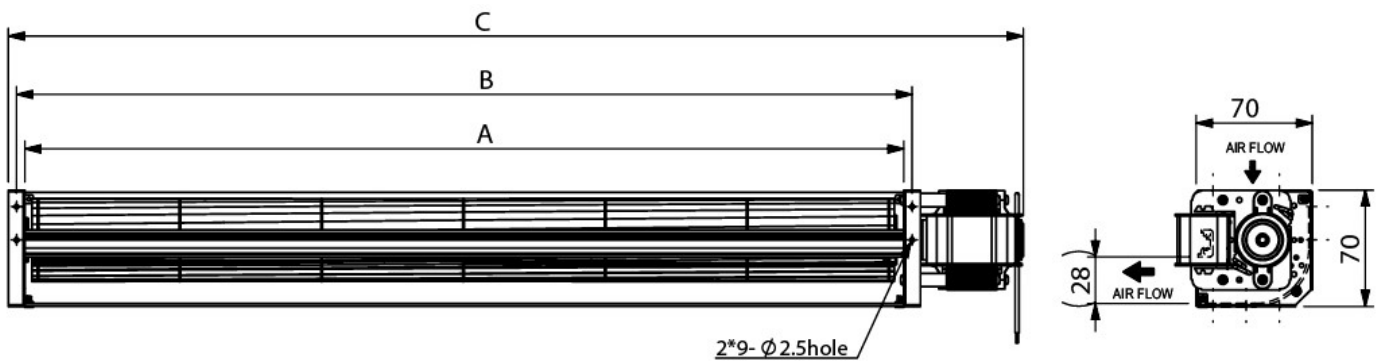


Model Number	Size (mm)			Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C									
CA0542V11_HWF	430	440	512	120	50/60	0.46/0.44	30/30	2450/2300	166/155	3.5/3.7	47/45	1500
CA0542V22_HWF				230	50/60	0.25/0.24	32/30	2350/2000	159/127	3.3/3.5	46/41	
CA0552V11_HWF	530	540	612	120	50/60	0.48/0.46	32/31	2250/1900	201/152	3.3/3.4	46/41	1600
CA0552V22_HWF				230	50/60	0.25/0.24	33/32	2200/1700	198/145	3.2/3.2	45/38	
CA0560V11_HWF	610	620	692	120	50/60	0.49/0.47	33/32	2200/1700	216/159	3.5/3.2	47/38	1600
CA0560V22_HWF				230	50/60	0.26/0.24	34/32	2100/1550	191/148	2.8/3.0	46/34	

\_ for B / S = Ball Bearing / Sleeve Bearing

CA0542F

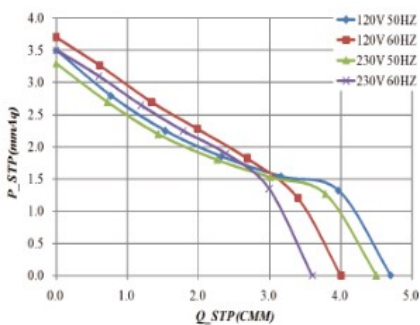

CA0550F

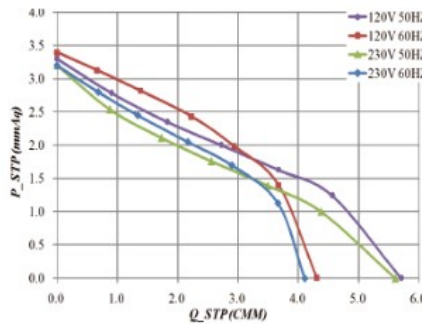

CA0560F

