
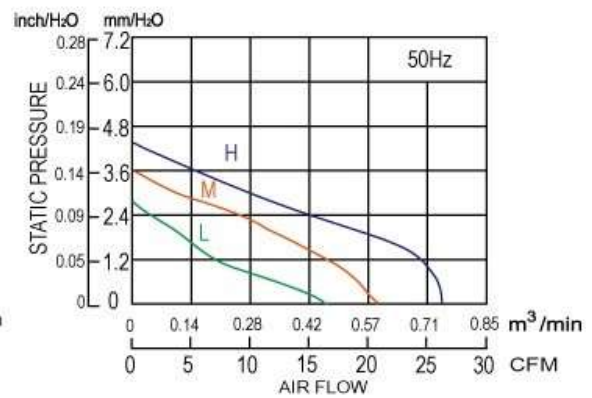
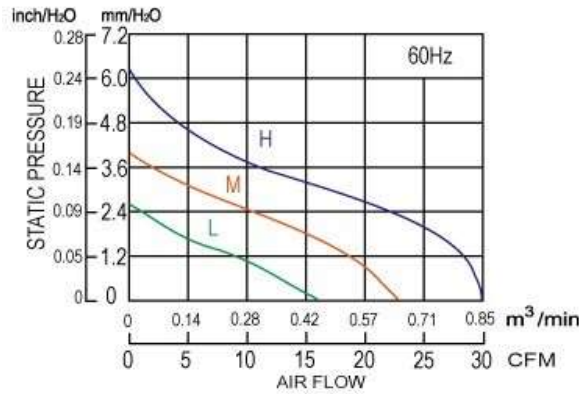


AA80383C SERIES

- Size: 80 x 80 x 38mm
- Housing: Aluminum
- Impeller: Glass fiber reinforced plastic UL94V-0
- Motor: AC Shaded Pole Type
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- IP Rating: IP21

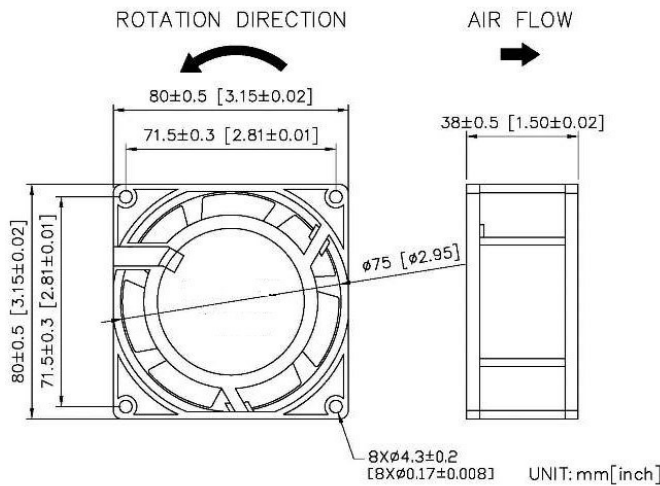

Model Number	Voltage	Frequency	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
AA8038V11BHW3C	110	50/60	0.14/0.12	13/12	2300/2700	26/30	4.3/6.1	30/35
AA8038V11BMW3C	110	50/60	0.12/0.10	10/9	2000/2300	21/23	3.6/3.8	24/27
AA8038V11BLW3C	110	50/60	0.08/0.06	6/5	1700/1900	17/16	3.0/2.5	21/23
AA8038V22BHW3C	230	50/60	0.10/0.08	13/12	2300/2700	26/30	4.3/6.1	30/35
AA8038V22BMW3C	230	50/60	0.08/0.06	10/9	2000/2300	21/23	3.6/3.8	24/27
AA8038V22BLW3C	230	50/60	0.05/0.04	6/5	1700/1900	17/16	3.0/2.5	21/23