
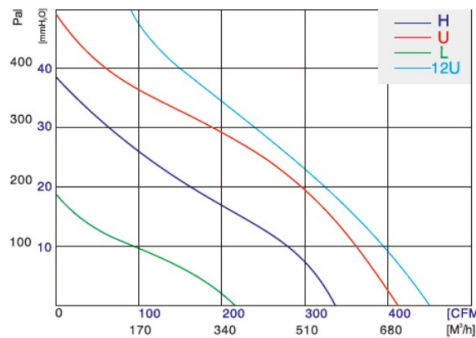
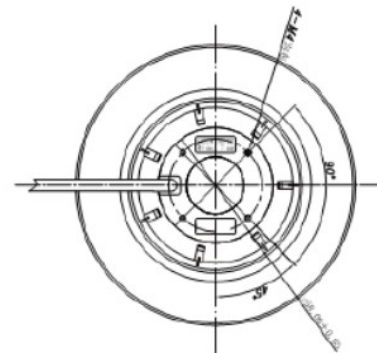
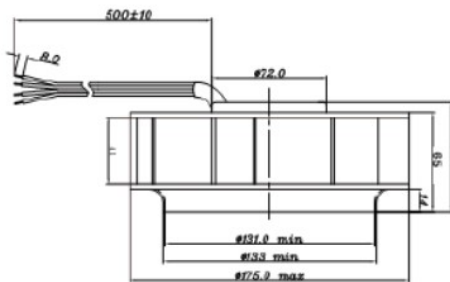


CFD17659L SERIES

- Size: $\Phi 175 \times 65\text{mm}$
- Impeller: Plastic & Metal
- Motor: DC Brushless Motor External Rotor
- Operating Temperature: -25°C to $+65^{\circ}\text{C}$
- Insulation: Class B
- Connection: Lead Wire
- Bearing: Ball Type
- Weight: 800g

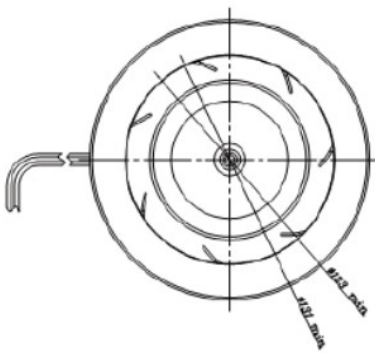

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD1765V12BUW9L	12	10	120	4400	450	72	75
CFD1765V24BUW9L	24	2.3	55.2	3800	369	43.7	70.5
CFD1765V24BHW9L	24	2.3	55.2	3300	330	38.1	64
CFD1765V28BUW9L	28	4	112	4400	428	50.7	85
CFD1765V48BUW9L	48	2.3	110.4	4200	408	48.4	81
CFD1765V48BHW9L	48	1.2	57.6	3300	330	38.1	64
CFD1765V48BLW9L	48	0.55	26.4	2500	215	18.1	60

W: Lead Wires
B: Ball Type