


# AD8025GD SERIES

- Size: 80 x 80 x 25mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 82.0g

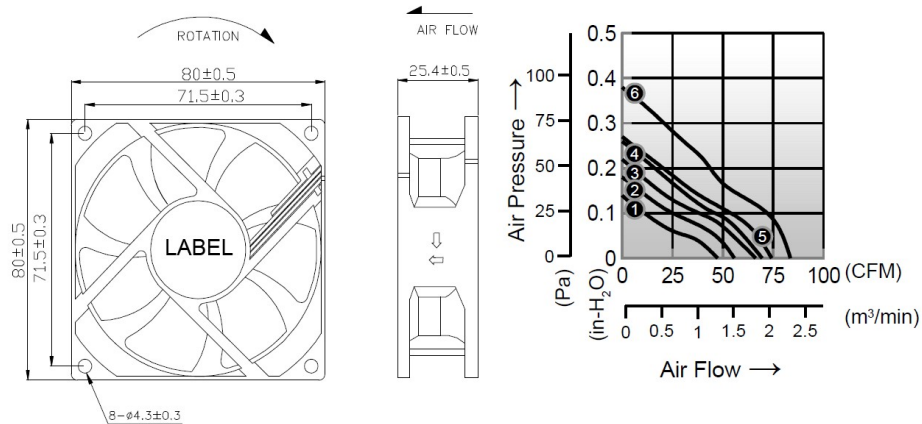

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH2O)	dB(A)
① AD8025V12BJWGD	12	0.20	2.40	3500	47.5	0.14	31
① AD8025V24BJWGD	24	0.12	2.88	3500	47.5	0.14	31
① AD8025V48BJWGD	48	0.10	4.80	3500	47.5	0.14	31
② AD8025V12BIWGD	12	0.32	3.84	4000	55.8	0.18	31
② AD8025V24BIWGD	24	0.16	3.84	4000	55.8	0.18	31
② AD8025V48BIWGD	48	0.15	7.20	4000	55.8	0.18	31
③ AD8025V12BLWGD	12	0.40	4.80	4500	66.4	0.22	39
③ AD8025V24BLWGD	24	0.22	5.28	4500	66.4	0.22	39
③ AD8025V48BLWGD	48	0.17	8.16	4500	66.4	0.22	39
④ AD8025V12BMWGD	12	0.65	7.80	5000	69.9	0.26	45
④ AD8025V24BMWGD	24	0.32	7.68	5000	69.9	0.26	45
④ AD8025V48BMWGD	48	0.19	9.12	5000	69.9	0.26	45
⑤ AD8025V12BHWGD	12	0.81	9.72	5500	74.3	0.27	48
⑤ AD8025V24BHWGD	24	0.45	10.80	5500	74.3	0.27	48
⑤ AD8025V48BHWGD	48	0.29	13.92	5500	74.3	0.27	48
⑥ AD8025V12BUWGD	12	1.00	12.00	6500	83.6	0.38	57
⑥ AD8025V24BUWGD	24	0.51	12.24	6500	83.6	0.38	57
⑥ AD8025V248UWGD	48	0.60	28.80	6500	83.6	0.38	57