
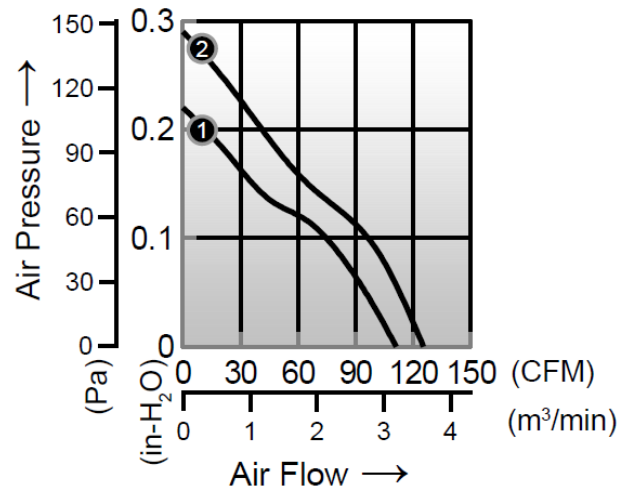


AD1225GD SERIES

- Size: 120 x 120 x 25mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 155.0g

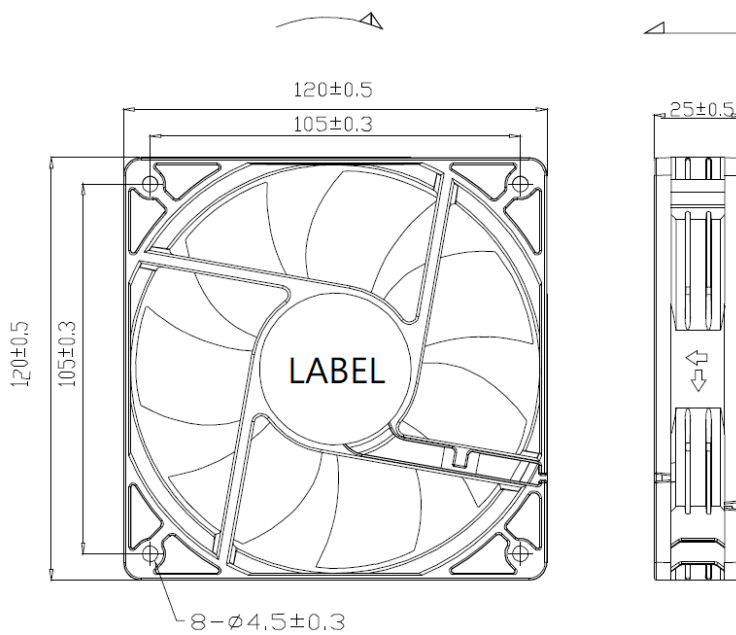

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH2O)	dB(A)
① AD1225V12BHWGD	12	0.28	3.36	2500	111.2	0.22	44
① AD1225V24BHWGD	24	0.25	6.00	2500	111.2	0.22	44
① AD1225V48BHWGD	48	0.10	4.80	2500	111.2	0.22	44
② AD1225V12BUWGD	12	0.47	5.64	3100	125.4	0.29	48
② AD1225V24BUWGD	24	0.30	7.20	3100	125.4	0.29	48
② AD1225V48BUWGD	48	0.12	5.76	3100	125.4	0.29	48

B = Ball Bearing