


## CD030B3L SERIES

- Size :  $\phi 30\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature :  $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A

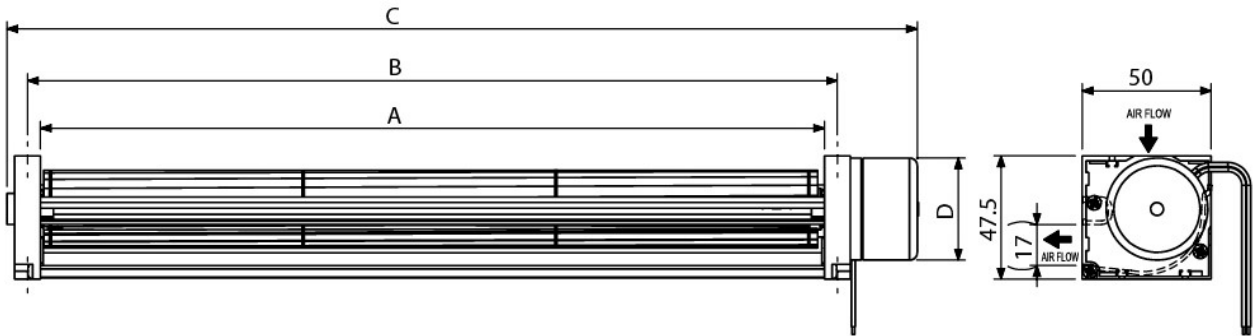

| Model Number     | Size (mm) |     |     |    | Voltage (V) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Pressure (mmH <sub>2</sub> O) | Noise dB(A) | Weight (g) |
|------------------|-----------|-----|-----|----|-------------|-------------|-----------|-------------|----------------|-------------------------------|-------------|------------|
|                  | A         | B   | C   | D  |             |             |           |             |                |                               |             |            |
| ①CD03024V12B3LWL | 244       | 254 | 288 | 31 | 12          | 0.22        | 2.64      | 2800        | 46             | 1.7                           | 37          | 210        |
| ①CD03024V24B3LWL |           |     |     |    | 24          | 0.13        | 3.12      |             |                |                               |             |            |
| ②CD03030V12B3LWL | 304       | 314 | 348 | 31 | 12          | 0.25        | 3.00      | 2600        | 53             | 1.5                           | 36          | 230        |
| ②CD03030V24B3LWL |           |     |     |    | 24          | 0.14        | 3.36      |             |                |                               |             |            |
| ③CD03035V12B3LWL | 357       | 367 | 401 | 31 | 12          | 0.27        | 3.24      | 2500        | 64             | 1.4                           | 35          | 260        |
| ③CD03035V24B3LWL |           |     |     |    | 24          | 0.15        | 3.60      |             |                |                               |             |            |
| ④CD03024V12B3HWL | 244       | 254 | 293 | 38 | 12          | 0.61        | 7.32      | 4250        | 71             | 4.8                           | 49          | 260        |
| ④CD03024V24B3HWL |           |     |     |    | 24          | 0.45        | 10.8      |             |                |                               |             |            |
| ⑤CD03030V12B3HWL | 304       | 314 | 353 | 38 | 12          | 0.67        | 8.04      | 4100        | 85             | 4.4                           | 48          | 290        |
| ⑤CD03030V24B3HWL |           |     |     |    | 24          | 0.45        | 10.8      |             |                |                               |             |            |
| ⑥CD03035V12B3HWL | 357       | 367 | 406 | 38 | 12          | 0.72        | 8.64      | 3950        | 95             | 3.5                           | 47          | 320        |
| ⑥CD03035V24B3HWL |           |     |     |    | 24          | 0.45        | 10.8      |             |                |                               |             |            |

\_for B/S=Ball Bearing/Sleeve Bearing

