


## CD030E/CD030B3F SERIES

- Size :  $\phi 30\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless Motor
- Operating Temperature :  $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A

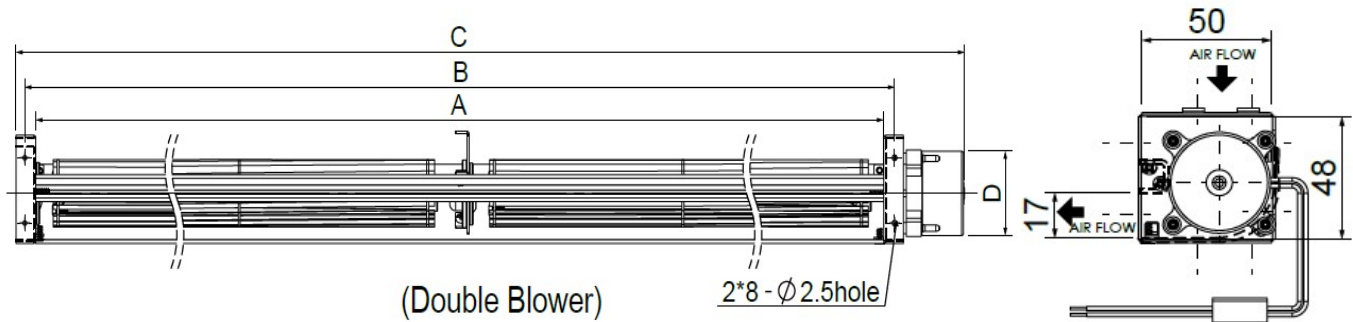

Model Number	Size (mm)				Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH <sub>2</sub> O)	Noise dB(A)	Weight (g)
	A	B	C	D								
①CD03009V12BHWE	98	108	133	31	12	0.16	1.92	3500	18	1.7	38	180
①CD03009V24BHWE					24	0.15	3.60					
②CD03015V12BHWE	160	170	195	31	12	0.20	2.40	3100	28	1.7	37	210
②CD03015V24BHWE					24	0.17	4.08					
③CD03019V12BHWE	198	208	233	31	12	0.23	2.76	2900	32	1.6	36	230
③CD03019V24BHWE					24	0.18	4.32					
④CD03029V12BHWE	300	310	335	31	12	0.27	3.24	2600	46	1.4	35	290
④CD03029V24BHWE					24	0.20	4.80					
⑤CD0303030V24B3HWF (Double Fan)	630	640	680	38	24	0.22	5.28	2850	113	1.8	36	580
⑥CD0303535V24B3HWF (Double Fan)	730	740	780	38		0.25	6.00	2750	138	1.7	35	630
⑦CD0304040V24B3HWF (Double Fan)	830	840	880	38		0.28	6.72	2650	148	1.6	34	690

\_for B/S=Ball Bearing/Sleeve Bearing

