
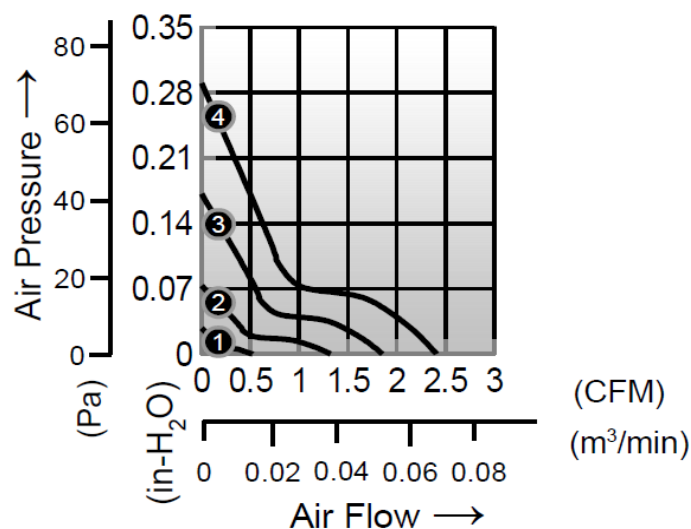


AD2510GE SERIES

- Size: 25 x 25 x 10mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 8.0g

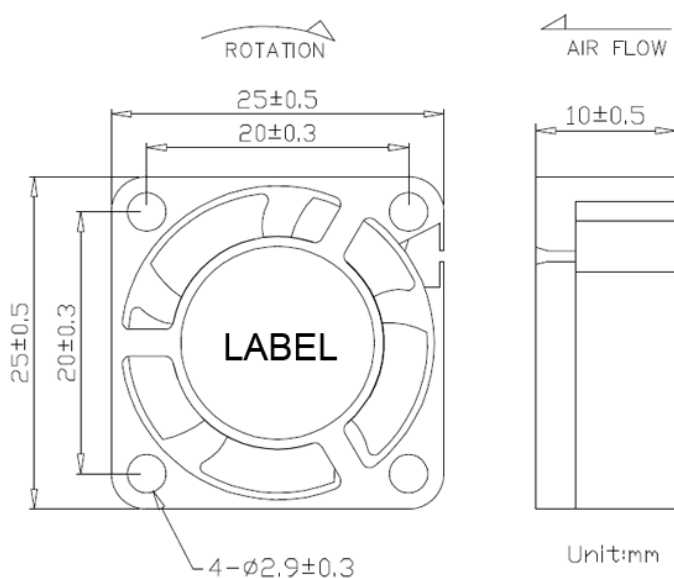

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH ₂ O)	dB(A)
① AD2510V05_JWGE	5	0.05	0.25	4000	0.52	0.03	10
① AD2510V12_LWGE	12	0.07	0.84	7000	1.32	0.07	20
② AD2510V05_LWGE	5	0.08	0.40	7000	1.32	0.07	20
② AD2510V12_MWGE	12	0.08	0.96	10000	1.85	0.17	24
③ AD2510V05_MWGE	5	0.13	0.65	10000	1.85	0.17	24
④ AD2510V05_HWGE	5	0.22	1.10	13000	2.41	0.29	28
④ AD2510V12_HWGE	12	0.12	1.44	13000	2.41	0.29	28
④ AD2510V24_HWGE	24	0.07	1.68	13000	2.41	0.29	28

_ for B / F = Ball Bearing / Fluid Bearing