


CD050B3M SERIES

- Size : $\phi 50\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)			Voltage	Current	Power	Speed	Air Flow	Pressure	Noise	Weight
	A	B	C	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(Kg)
①CD05042V24B3HWM	430	440	486	24	0.46	11.04	2800	134	2.0	43	1.00
②CD05052V24B3HWM	530	540	586	24	0.49	11.76	2750	163	2.0	43	1.10
③CD05060V24B3HWM	610	620	666	24	0.55	13.20	2700	184	1.9	42	1.20

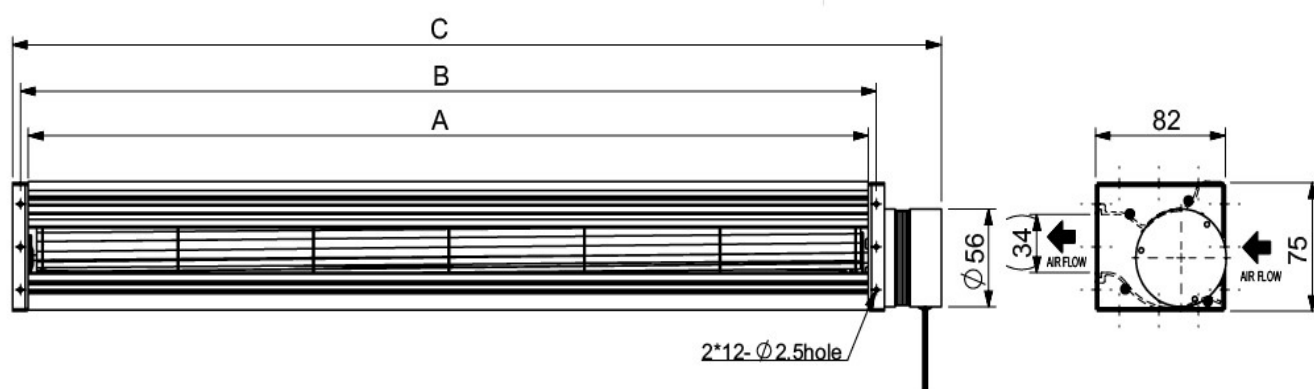