
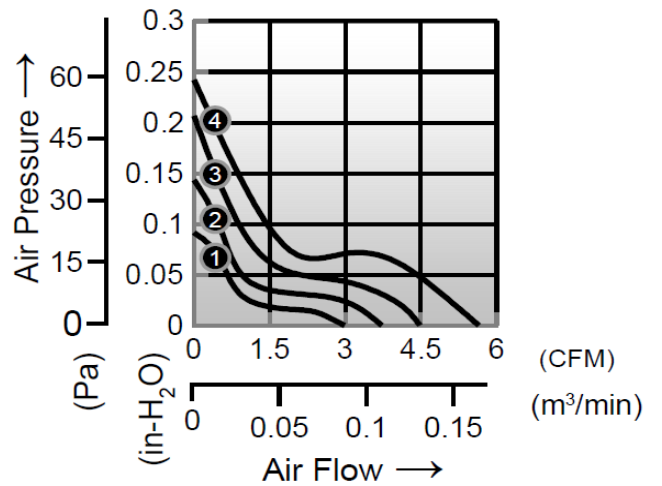


AD3010GE SERIES

- Size: 30 x 30 x 10mm
- Housing: Plastic (UL 94V-0)
- Impeller: Plastic (UL 94V-0)
- Motor: 4 Pole Brushless DC Motor
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A
- Weight: 10.0g

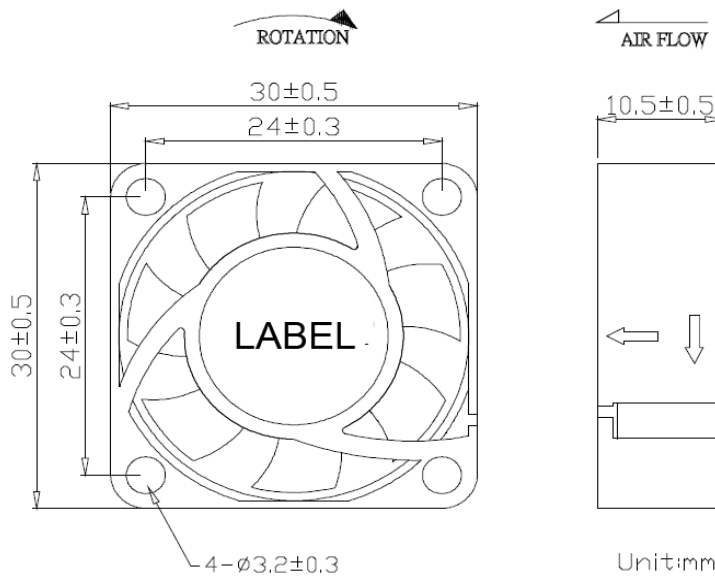

Model Number	Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(A)	(W)	(RPM)	(CFM)	(inH2O)	dB(A)
① AD3010V05_LWGE	5	0.09	0.45	6000	2.99	0.09	17
① AD3010V12_LWGE	12	0.03	0.36	6000	2.99	0.09	17
② AD3010V05_MWGE	5	0.12	0.60	7500	3.73	0.14	24
② AD3010V12_MWGE	12	0.05	0.60	7500	3.73	0.14	24
③ AD3010V05_HWGE	5	0.24	1.20	9000	4.48	0.21	29
③ AD3010V12_HWGE	12	0.07	0.84	9000	4.48	0.21	29
④ AD3010V05_UWGE	5	0.27	1.35	11000	5.65	0.24	31
④ AD3010V12_UWGE	12	0.09	1.08	11000	5.65	0.24	31

_ for B / F = Ball Bearing / Fluid Bearing