


CD060B3M SERIES

- Size : $\phi 60\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise (dB(A))	Weight (Kg)
	A	B	C								
①CD06030V24B3HWM	310	325	370	24	0.53	12.72	2650	117	2.5	45	0.95
②CD06036V24B3HWM	370	385	430	24	0.58	13.92	2600	139	2.5	45	1.00
③CD06042V24B3HWM	430	445	490	24	0.63	15.12	2550	163	2.4	44	1.10
④CD06052V24B3HWM	530	545	590	24	0.69	16.56	2450	198	2.3	43	1.25
⑤CD06060V24B3HWM	610	625	670	24	0.73	17.52	2400	219	2.3	43	1.35
⑥CD06070V24B3HWM	710	725	770	24	0.79	18.96	2350	244	2.2	42	1.45
⑦CD0604242V24HWM (Double Fan)	870	885	953	24	0.86	20.64	2350	290	2.2	42	1.90

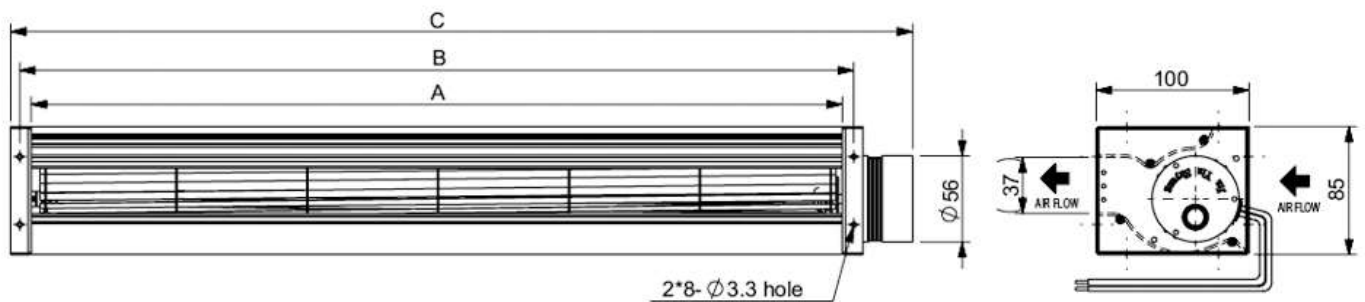