


CD060B3QF SERIES

- Size: $\phi 60\text{mm}$
- Housing / Impeller: Aluminum / Aluminum
- Motor: DC Brushless 3-Phase Motor
- Operating Temperature: $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation: Class A



| Model Number | Size (mm) | | | Voltage (V) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Pressure (mmH ₂ O) | Noise dB(A) | Weight (Kg) |
|--------------------|-----------|-----|-----|-------------|-------------|-----------|-------------|----------------|-------------------------------|-------------|-------------|
| | A | B | C | | | | | | | | |
| ① CD06012V24B3HWQF | 120 | 130 | 170 | 24 | 0.24 | 5.76 | 2000 | 64 | 6.4 | 49 | 0.4 |
| ② CD06018V24B3HWQF | 180 | 190 | 230 | 24 | 0.28 | 6.72 | 1600 | 78 | 4.6 | 44 | 0.57 |
| ③ CD06024V24B3HWQF | 240 | 250 | 310 | 24 | 0.51 | 12.24 | 2000 | 138 | 6.1 | 49 | 0.79 |
| ④ CD06030V24B3HWQF | 300 | 310 | 370 | 24 | 0.59 | 14.16 | 1850 | 166 | 5.5 | 47 | 0.86 |
| ⑤ CD06036V24B3HWQF | 360 | 370 | 430 | 24 | 0.66 | 15.84 | 1750 | 198 | 5.3 | 46 | 0.95 |

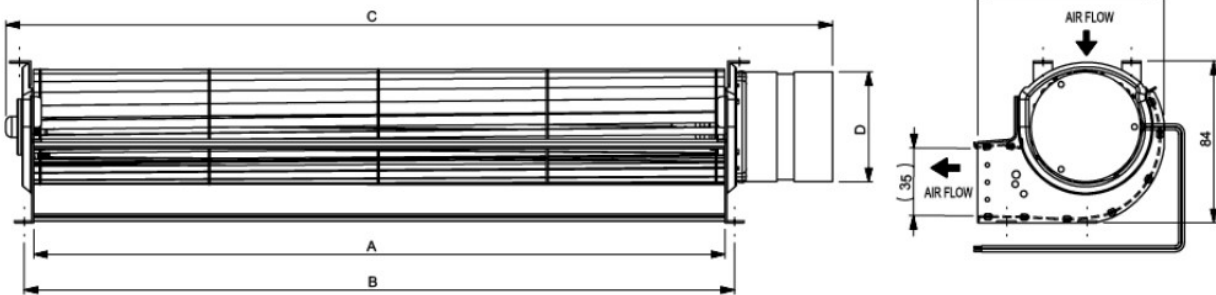