


CD065B3Q SERIES

- Size : $\phi 65\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)			Voltage	Current	Power	Speed	Air Flow	Noise	Weight
	A	B	C	(V)	(A)	(W)	(RPM)	(CFM)	dB(A)	(g)
①CD06518V24B3HWQ	180	172	250	24	0.20	4.80	1400	78	44	740
②CD06524V24B3HWQ	240	232	310	24	0.23	5.52	1300	102	43	810
③CD06530V24B3HWQ	300	292	370	24	0.27	6.48	1250	134	43	930
④CD06536V24B3HWQ	360	352	430	24	0.29	6.96	1200	155	42	1050
⑤CD06542V24B3HWQ	420	412	490	24	0.32	7.68	1150	180	41	1110

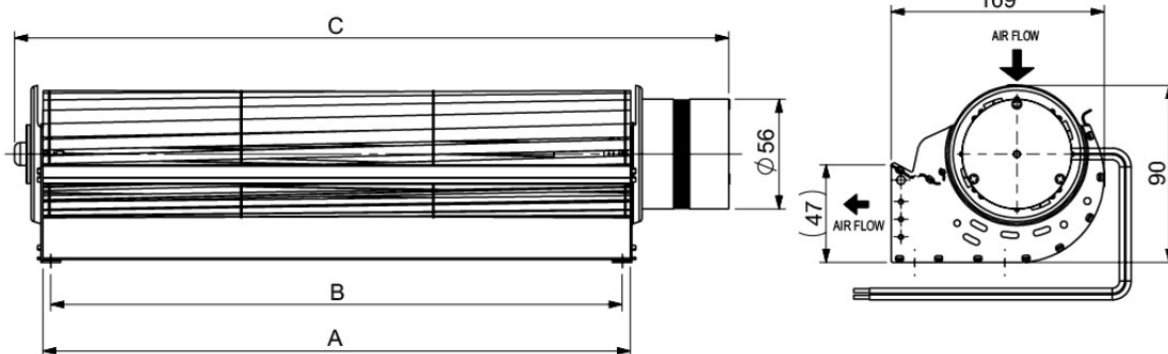