
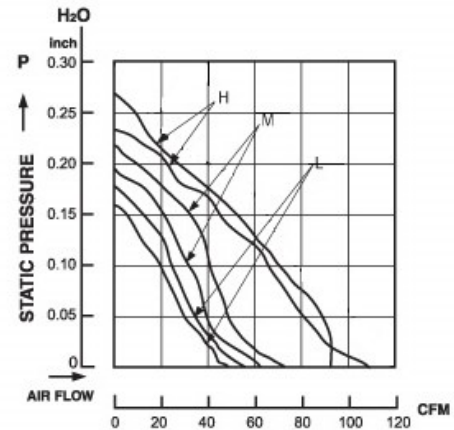


AA1238C5 SERIES

- Size: 120 x 120 x 38mm
- Housing: Aluminum
- Impeller: Thermoplastic PBT, UL94V-0
- Motor: AC Shaded Pole Type
- Operating Temperature: -10°C ~ +70°C
- Insulation: Class A

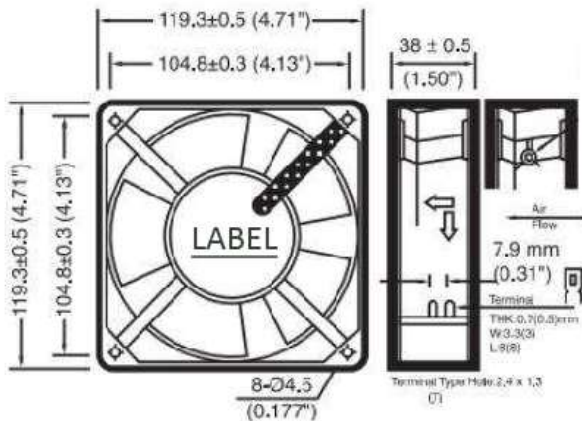

Model Number	Voltage	Frequency	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(Hz)	(A)	(W)	(RPM)	(CFM)	(mmH2O)	dB(A)
AA1238V11_H*C5	115	50/60	0.24/0.18	18/17	2700/3000	80/105	5.84/7.11	42/47
AA1238V11_M*C5	115	50/60	0.13/0.12	11/10	2200/2500	63/71	4.82/5.33	37/39
AA1238V11_L*C5	115	50/60	0.11/0.10	9/8	1800/2000	54/52	4.06/3.81	30/34
AA1238V22_H*C5	220	50/60	0.13/0.11	18/17	2700/3000	80/105	5.84/7.11	42/47
AA1238V22_M*C5	220	50/60	0.11/0.09	11/10	2200/2500	63/71	4.82/5.33	37/39
AA1238V22_L*C5	220	50/60	0.08/0.06	9/8	1800/2000	54/52	4.06/3.81	30/34

_ for B / S = Ball Bearing / Sleeve Bearing,
 * for T/W = Terminals/ Lead Wires