


CD050B3E/CD050B3F SERIES

- Size : $\phi 50\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : * CD050E : DC Brushless 3-Phase Motor
* CD050F : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)				Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH ₂ O)	Noise dB(A)	Weight (g)
	A	B	C	D								
① CD05009V24B3HWE	98	108	148	38	24	0.13	3.12	2600	112	5.9	37	370
② CD05019V24B3HWE	198	208	248	38	24	0.31	7.44	2500	88	4.7	43	470
③ CD05029V24B3HWE	298	308	348	38	24	0.35	8.40	2200	124	4.3	44	590
④ CD05035V24B3HWE	358	368	408	38	24	0.26	6.24	1800	134	3.7	36	660
⑤ CD05042V24B3HWE	428	438	478	38	24	0.27	6.48	1700	148	3.3	35	730
⑥ CD05042V24B3HWF	430	440	486	56	24	0.36	8.64	2050	141	2.1	43	850
⑦ CD05052V24B3HWF	530	540	586	56	24	0.39	9.36	2000	177	2.1	43	960
⑧ CD05060V24B3HWF	610	620	666	56	24	0.44	10.36	1900	191	1.9	42	1020
⑨ CD0503535V24B3HWF (Double Fan)	730	740	786	56	24	0.47	11.28	1900	223	2.0	42	1210
⑩ CD0504242V24B3HWF (Double Fan)	870	880	926	56	24	0.52	12.48	1800	254	1.8	42	1350

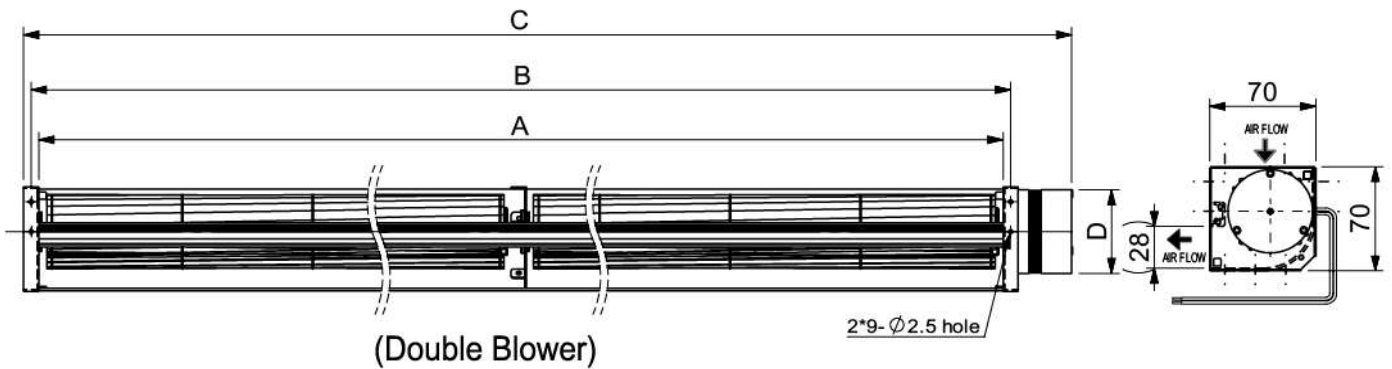