


CD040E, CD040B3E, CD040B3F SERIES

- Size : $\phi 40\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : * CD040E : DC Brushless Motor
 - * CD040B3E : DC Brushless 3-Phase Motor
 - * CD040F : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A

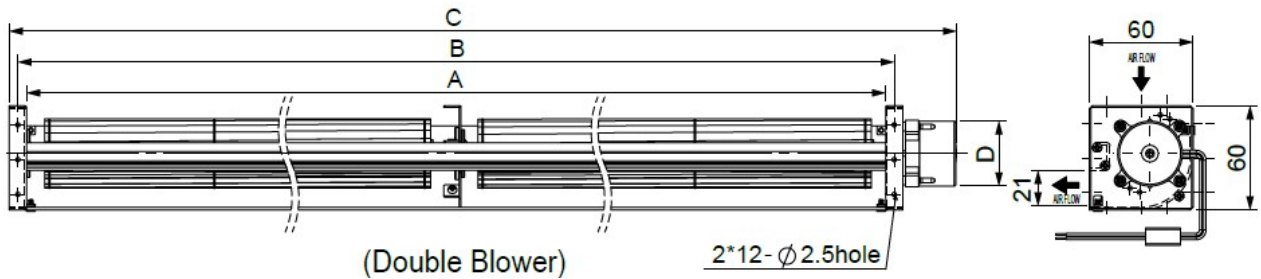

Model Number	Size (mm)				Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH ₂ O)	Noise dB(A)	Weight (g)
	A	B	C	D								
①CD04009V12BHWE	98	108	133	31	12	0.22	2.64	2950	25	2.5	37	220
①CD04009V24BHWE					24	0.17	4.08					
②CD04015V12BHWE	160	170	195	31	12	0.28	3.36	2500	35	1.9	37	260
②CD04015V24BHWE					24	0.19	4.56					
③CD04019V12B3HWE	198	208	233	31	12	0.29	3.48	2400	46	2.2	36	275
③CD04019V24B3HWE					24	0.16	3.84					
④CD04029V12B3HWE	300	310	355	31	12	0.33	3.96	2000	64	1.6	32	350
④CD04029V24B3HWE					24	0.18	4.32					
⑤CD04030V24B3HWE	310	320	350	38	24	0.30	7.20	2600	95	3.0	39	420
⑥CD04035V24B3HWE	360	370	400	38	24	0.32	7.68	2450	106	2.6	38	470
⑦CD04040V24B3HWE	410	420	450	38	24	0.34	8.16	2300	124	2.5	37	510
⑧CD0403030V24B3HWF (Double Fan)	630	640	670	38	24	0.26	6.24	1800	131	1.4	39	690
⑨CD0403535V24B3HWF (Double Fan)	730	740	770	38	24	0.27	6.48	1750	148	1.4	38	770
⑩CD0404040V24B3HWF (Double Fan)	830	840	870	38	24	0.28	6.72	1600	163	1.3	37	830

_for B/S=Ball Bearing/Sleeve Bearing

