


## CD060B3E/CD060B3G SERIES

- Size :  $\phi 60\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : \* CD060E : DC Brushless 3-Phase Motor  
\* CD060G : DC Brushless 3-Phase Motor
- Operating Temperature :  $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)				Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C	D								
① CD06012V24B3HWE	124	139	169	38	24	0.35	8.40	2500	67	4.4	49	500
② CD06018V24B3HWE	184	199	229	38	24	0.40	9.60	2200	88	3.2	45	580
③ CD06024V24B3HWE	245	260	305	56	24	0.42	10.08	2100	117	3.6	44	850
④ CD06030V24B3HWE	306	321	366	56	24	0.46	11.04	2000	145	3.5	43	930
⑤ CD06036V24B3HWE	365	383	428	56	24	0.51	12.24	1950	166	3.4	43	1000
⑥ CD06042V24B3HWE	429	444	489	56	24	0.53	12.72	1900	187	3.3	43	1080
⑦ CD06052V24B3LWG	530	545	590	56	24	0.58	13.92	1750	219	2.8	43	1200
⑧ CD06060V24B3LWG	610	625	670	56	24	0.64	15.36	1650	247	2.7	43	1290
⑨ CD06070V24B3LWG	710	725	770	56	24	0.68	16.32	1600	249	2.3	42	1400
⑩ CD06052V24B3HWG	530	545	613	56	24	1.07	25.68	2250	290	4.1	53	1350
⑪ CD06060V24B3HWG	610	625	693	56	24	1.13	27.12	2200	325	4.0	53	1440
⑫ CD06070V24B3HWG	710	725	793	56	24	1.20	28.80	2100	360	3.7	52	1550
⑬ CD604242V24B3HWG (Double Fan)	870	885	953	56	24	1.20	28.80	2000	403	3.5	50	1740

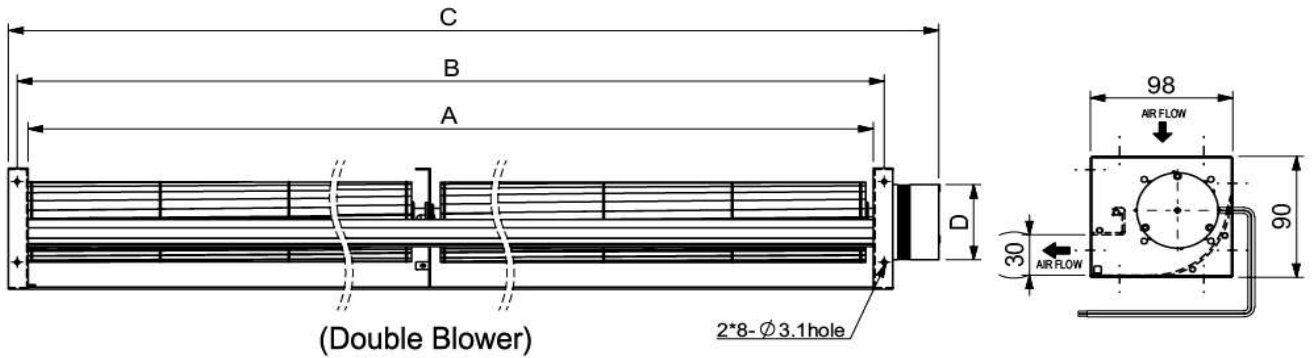